




KLIC-7004 Li-ION Battery

Effective: June 2007

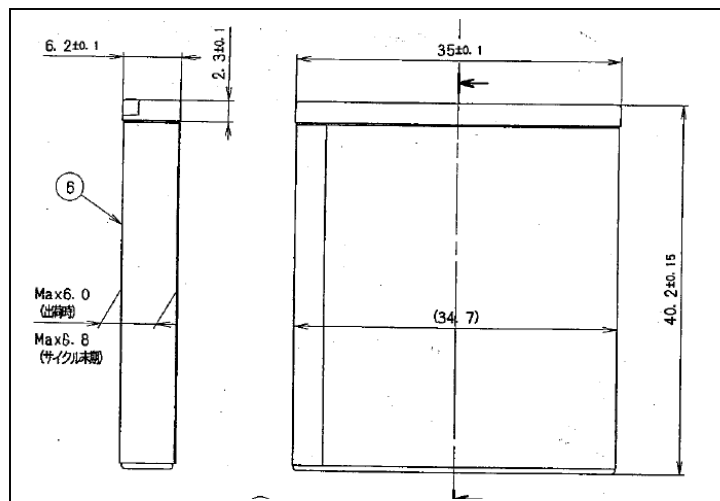

System:	Li-ION
Designation:	ANSI/IEC
Nominal Voltage:	3.7 Volts
Capacity:	≤ 1000mAh, Min 950mAh
End Voltage:	3.Volts
Charging Current:	1050 mA
Charging Voltage:	4.2 + or – 1% VDC
Discharger Current (Std):	1050mA
Discharger Current (Max):	1.24A
Charging Cycles:	Up to 300
Internal Resistance:	160 mOhm
Temperature Range:	0°C to +50°C Operating -20°C to +30°C Storage 0°C to +40°C Charging
Approx. Weight:	17.5 grams
Volume:	6.5 cm ³
Terminals:	Flat Contacts
Jacket:	Plastic Housing, Film Label

The Data in this publication represents product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. Company reserves the right to change and improve product characteristics at any time.

For more information, contact
Eastman Kodak Company
343 State Street
Rochester NY 14650-0811
1-800-242-2424
www.kodak.com/go/batteries